




57HD-LG INSTRUCTIONS

Instructions for using liner cut gage with Profax FC250 and FC400 MIG guns

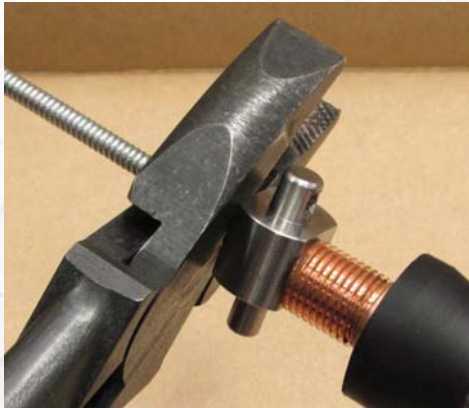

1. Cut liner flush with liner cut gage. It is normal for about one liner coil to protude past in the gage.




2. Push liner back with liner cut gage, then tighten liner set screw in handle using 5/64" hex key. (The small hole at the top of the 57HD-LG is for attaching the gage to a key ring).

Instructions for using liner cut gage with Profax HD250, HD400 and HD450 MIG guns



1. Cut liner flush with liner cut gage. It is normal for about one liner coil to protude past in the gage.

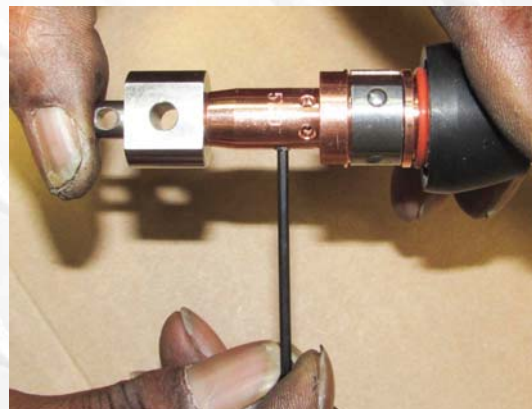

2. Push liner back with liner cut gage, then tighten set screw in gas diffuser using 5/64" hex key. (The small hole at the top of the 57HD-LG is for attaching the gage to a key ring).