




## WELDING POSITIONER CHUCKS



### Features

- 3 Jaw Self Centering
- Reversible Jaws
- Easy Mounting

Part No.	Diameter	Clamping Range A - A1	I.D. Range B - B1	External Jaw Clamping Range C - C1	Weight	Used on Positioners
PXWPC-6	158 mm	3.2 - 54 mm	50 - 158 mm	57 - 142 mm	9 kg	WP250-2
PXWPC-12	317 mm	12.5 - 139 mm	95 - 314 mm	98 - 314 mm	47 kg	WP500-2, WP1000-2
PXWPC-16	400 mm	16 - 209 mm	120 - 400 mm	120 - 400 mm	75 kg	WP500-2, WP1000-2, WP2000-4
PXWPC-20	498 mm	25 - 279 mm	149 - 498 mm	149 - 498 mm	117 kg	WP1000-2, WP2000-4, WP6000-4
PXWPC-25	628 mm	50 - 349 mm	168 - 628 mm	168 - 628 mm	209 kg	WP2000-4, WP6000-4

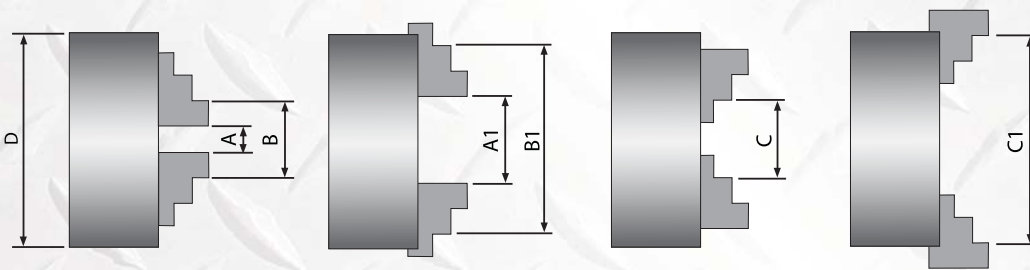

## WELDING POSITIONER GRIPPERS

### Features

- Self Centering
- Reversible Jaws
- Easy Mounting

PART No.	POSITIONER	O.D. CAPACITY	I.D. CAPACITY
WPG-22	WP500-2, WP1000-2, WP2000-4, WP6000-4	25 - 381 mm	101 - 558 mm
WPG-26	WP1000-2, WP-2000-4, WP6000-4	38 - 457 mm	152 - 660 mm
WPG-34	WP2000-4, WP-6000-4	50 - 660 mm	152 - 863 mm

